TDJ-2600SPL9

Grid Parabolic Antenna

Technical Sheet




Applications

- MMDS Antenna
- Long-Range Directional Applications
- Point to Point/Point to Multi-point Systems

Features


- Superior Performance
- Aluminum Die Cast Grid
- UV Stable Light Gray Powder Coat Finish
- All Weather Operation
- Easy to Assemble

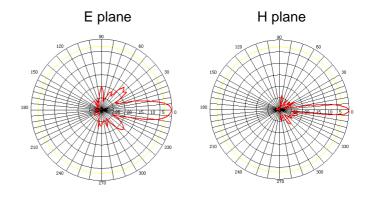

Specifications

Model	TDJ-2600SPL9
Freq. Range-MHz	2500~2700
Gain-dBi	24
Vertical Beamwidth-°	13
Horizontal Beamwidth-°	9
VSWR	≤1.5
F/B Ratio-dB	≥25
Impedance-Ω	50
Polarization.	Vertical or Horizontal
Max. Power-W	200
Connector Type	N Female or
	Customization
Dimension-m	0.6×0.9
Weight-Kg	2.5
Pole Diameter-mm	Ф40∼50

Install Sketch

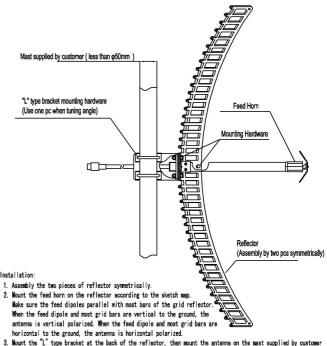

3. Mount the "L" type bracket at the back of the reflector, then mount the antenna on the mast supplied by customer

according to the sketch map. 4. Test the antenna with equipment to make sure the antenna receive the best signal by tuning the azimuth and pitching angle, then lock all the screws and seal the connector between antenna and cable.

